GRABO
1905

FORTIS *SILVER KNIGHT*

HIGH PERFORMANCE, NON-DIRECTIONAL HOMOGENEOUS FLOOR COVERING WITH SILVER KNIGHT SURFACE

PERFORMANCE, FEATURES & BENEFITS

- Good abrasion resistance
- Exceptional dimensional stability
- Low residual indentation
- Eliminates harmful bacteria and viruses without the use of chemicals
- Antistatic

RECOMMENDED USAGE

- Healthcare
- Education
- Offices
- Other public areas

CONSTRUCTION

- Silver Knight iGuard Surface
- Non-directional homogeneous layer

TOTAL THICKNESS 2.0 mm

TOTAL WEIGHT 2.8 kg/m²

DIMENSIONAL STABILITY avarage 0.1 %

EUROPEAN CLASSIFICATION 34 | 43


FLOOR HEATING

NO WAX


BEST DIMENSIONAL STABILITY ON THE MARKET

DESCRIPTION		FORTIS Silver Knight
Construction		homogeneous
Binder content	EN ISO 10581	Type I.
Total thickness	EN ISO 24346	2.0 mm
Wear layer thickness	EN ISO 24340	2.0 mm
Width of roll	EN ISO 24341	2 m
Length of roll	EN ISO 24341	20 lm
Total weight	EN ISO 23997	2.8 kg/m²
CLASSIFICATION		
European classification	ISO 10874	class: 34/43
PERFORMANCE		
Abrasion group	EN 660-2	T
Residual indention	EN ISO 24343	max. 0.1 mm
Dimensional stability	EN ISO 23999	max. 0.2 %
	EN ISO 23999	average 0.1 %
Fire resistance	EN 13501-1	class: Bfl-s1
Slip resistance	EN 13893	class: DS
	DIN 51130	class: R9
Electrical resistance	EN 1815	< 2 kV
Chemical resistance	EN ISO 26987	✓
Light fastness	EN ISO 105-B02	grade 6
Castor chair resistance	EN ISO 4918	✓
Surface treatment		Silver Knight iGUARD
Bacteriostatic activity	ISO 22196	>99%
Antiviral activity	ISO 21702	>99%
Seaming method		hot or cold welding
Warranty		10 year

SILVER KNIGHT
iGUARD SURFACE

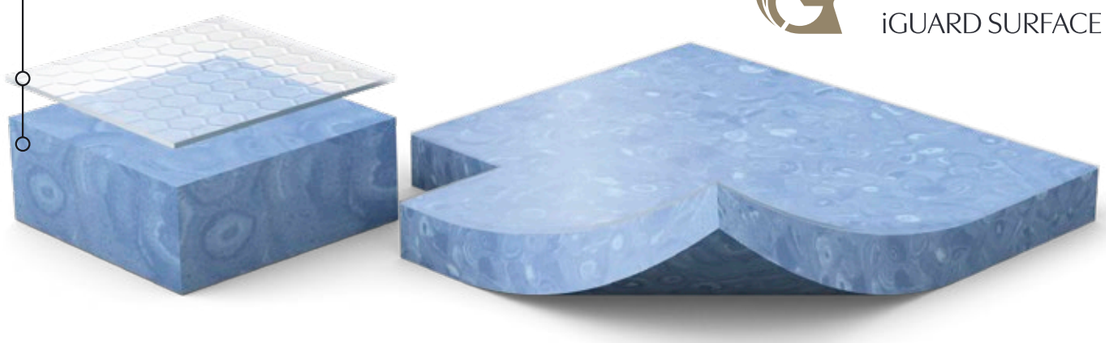

HOMOGENEOUS FLOOR COVERINGS

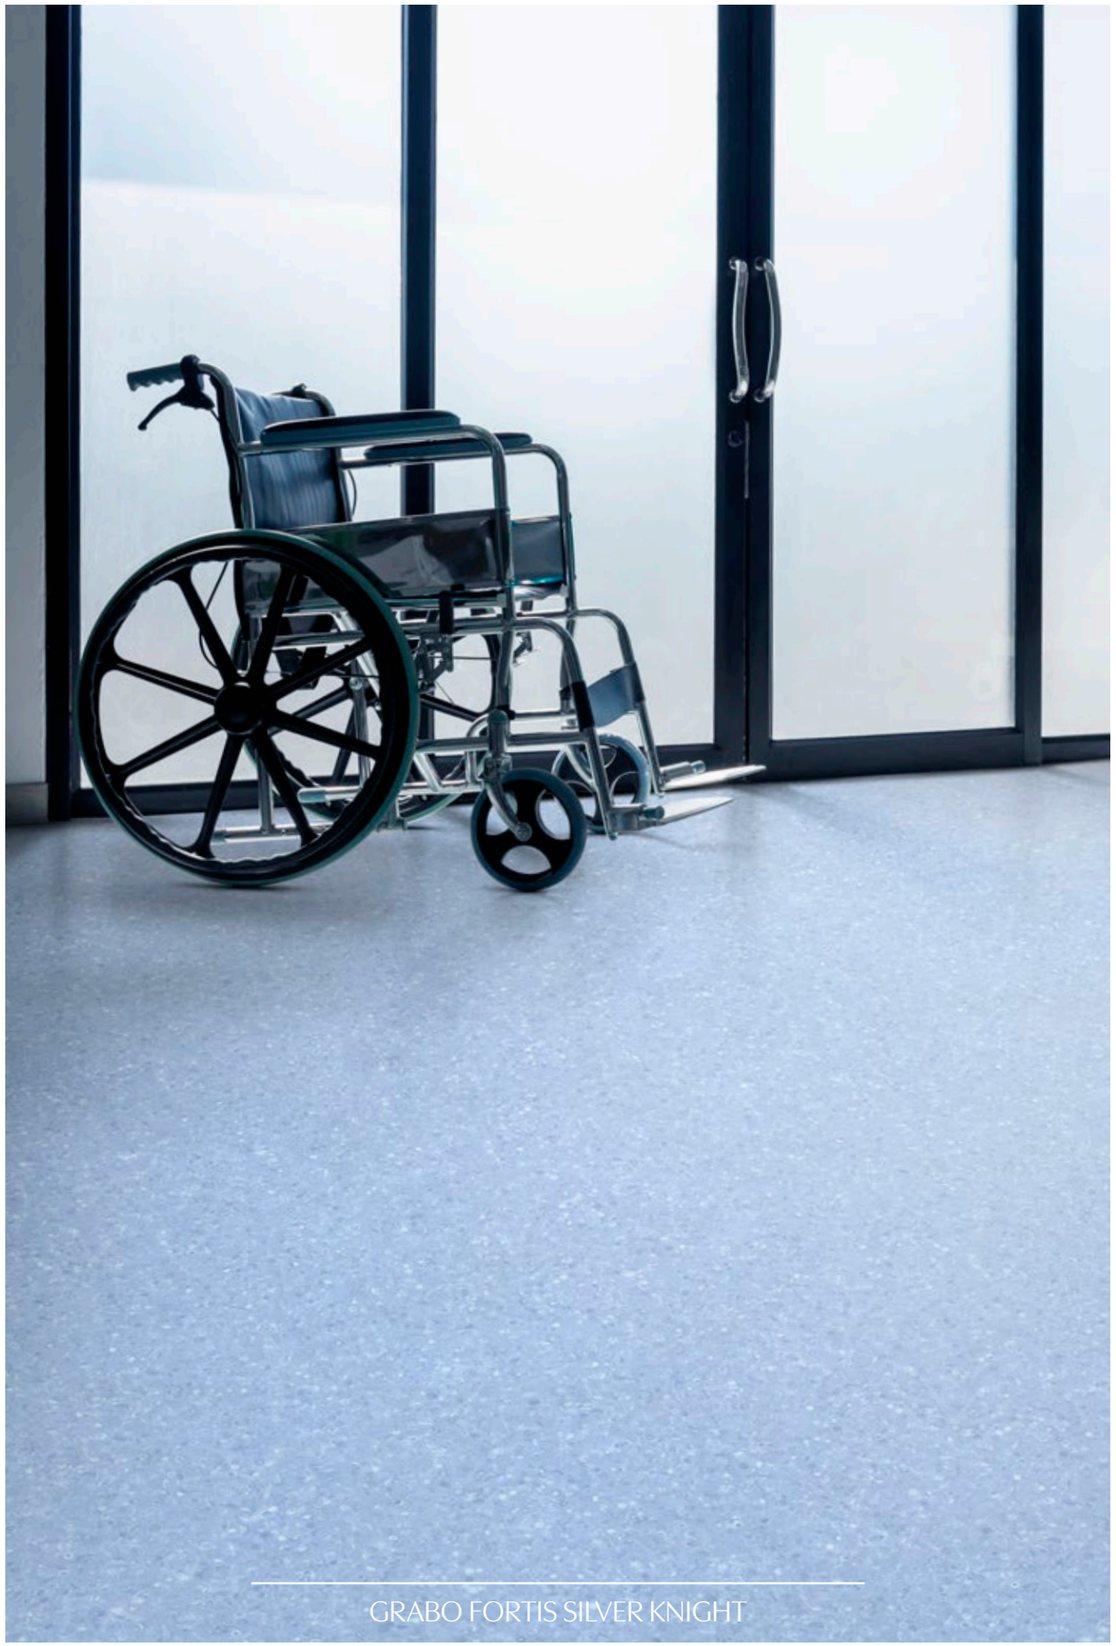


GRABO FORTIS SILVER KNIGHT


FORTIS *SILVER KNIGHT*




SAND

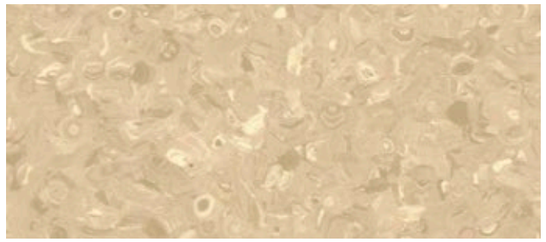


TOBACCO

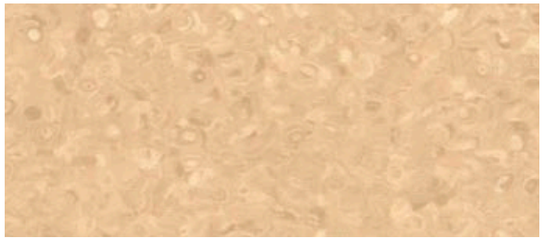


CARAMEL

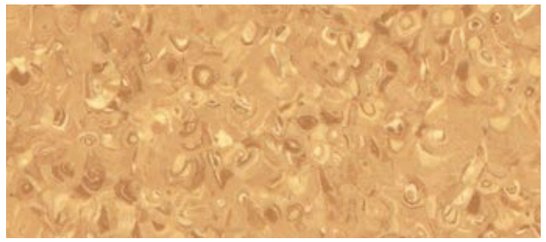

KORK

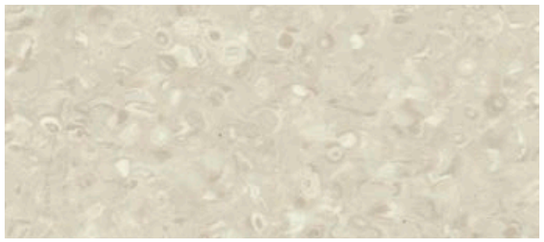


SILVER

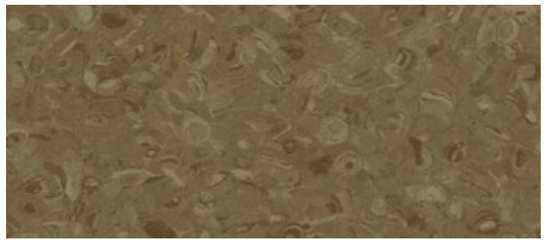


MOCCA




CANARI

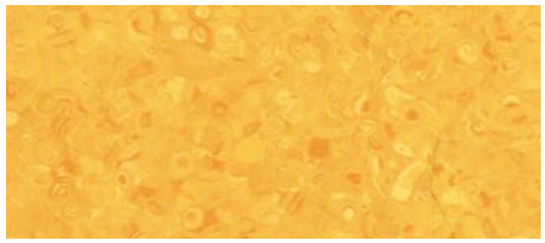

GOLD

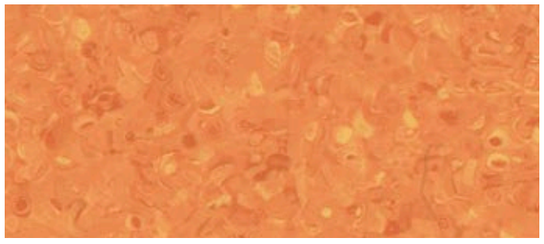


ORANGE

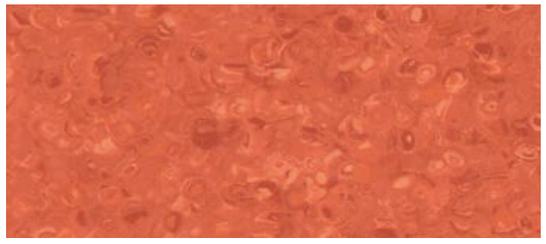


CORAL


SILVER KNIGHT
iGUARD SURFACE
FLOOR HEATING
NO WAX

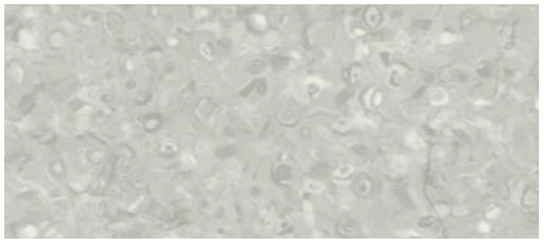


BONE

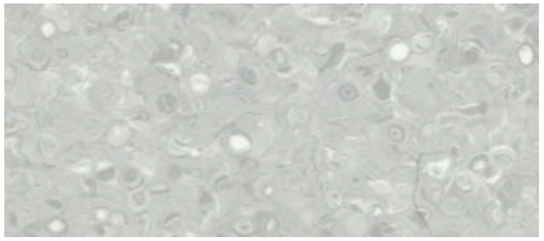


FOG

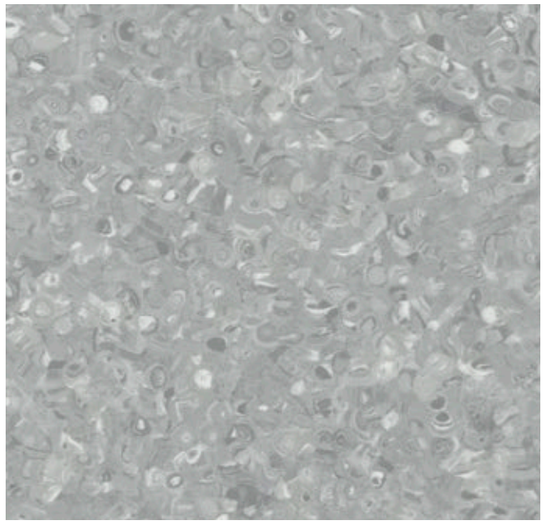


STEEL

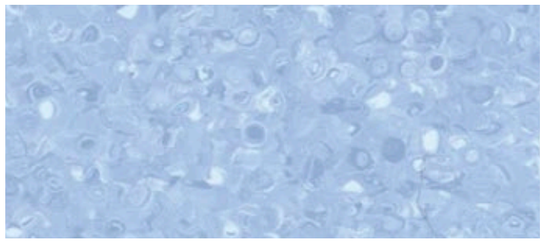


AQUA

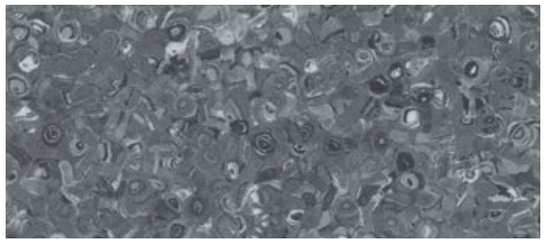


ANTHRACITE

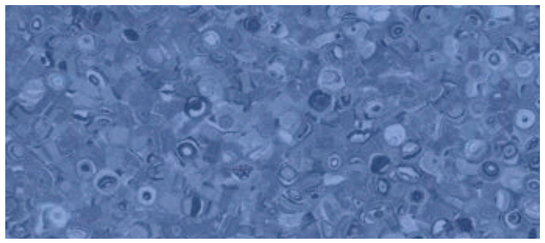


INDIGO

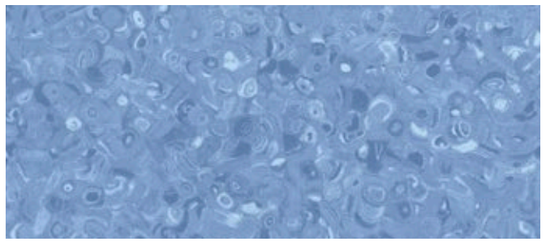

COBALT

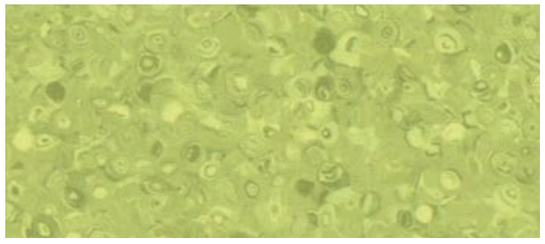

KIWI

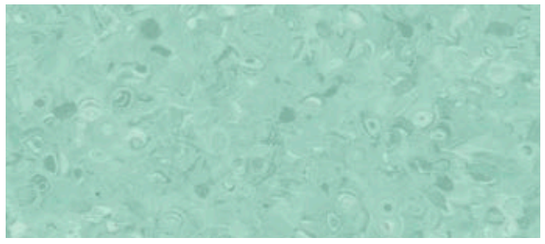

CACTUS